PRODUCT CATALOGUE 2027

Dry Cabinets and Drying Ovens

ESD dry cabinets and nitrogen cabinets from 98 to 1436 litres, special cabinets and drying ovens for electronics manufacturing.



DISTRIBUTOR FOR EUROPE

InterElectronic

3 YEARS FULL WARRANTY

www.inte-on.com

INTRODUCTION

Moisture control for component storage



INTEON dry cabinets protect moisture sensitive components, boards and materials from humidity, oxidation and static. The dry cabinets and nitrogen cabinets are anti-static (ESD) coated and designed to IPC/JEDEC J-STD-033. The drying ovens cover baking, drying and heat aging.

Warranty

3 years

Best in the industry warranty: 3 years full warranty.

Support - Europe

For more complex appliances our company offers the necessary training for set-up and use. We repair all products traded by our company during and after the warranty period, and we guarantee the continuous supply of accessories.

On-site visit

If any of our products has aroused your interest, INTEON will be glad to visit your company and give a presentation of the product. Major machines can also be viewed at our partners' sites.

Offers

Most of our product prices can be requested on our website and will be sent to you by email. For special and more complex machines, prices are given individually after consultation, in a price offer. For more information or user manuals, visit our continuously updated website (www.inte-on.com). You are also welcome to visit our office, where you can purchase the devices and spare parts you need.

CONTENTS

Dry cabinets and drying ovens

DRY CABINETS			
	**ESD Dry Cabinets 1–5% RH**	DRY98EU ... DRY1436EU-6	6
	**ESD Dry Cabinets 1–10% RH**	DRY98EC ... DRY1436EC-6	7
	**ESD Dry Cabinets 10–20% RH**	DRY98EB ... DRY1436EB-6	8
	**ESD Nitrogen Cabinets 1–60% RH**	DRY98ED ... DRY1436ED-6	9
OPTIONS			
	**Shelves, drawers and reel holders**	for every ESD cabinet	10
	**Further options**	alarm, heating, nitrogen, data logging	11
SPECIAL CABINETS			
	**Dry Cabinet with 60 °C Heating**	DRY-1000-H60	12
	**Intelligent Reel Storage Cabinet**	CTC1436BFD-ZNLJ	12
	**Automatic Cabinet with N2 Generator**	1–60% RH	13
	**Clean Nitrogen Cabinet**	Class 10, 100, 1000	13
	**Auto Door Nitrogen Cabinet**	customizable	14
	**Constant Humidity and Temperature Cabinet**	HCT800A, HCT800B, HCT800C	14
DRYING OVENS			
	**Desk Type Blast Drying Ovens**	DCTG-9023A ... DCTG-9205A	15
	**Vertical Blast Drying Ovens**	VCTG-9030A ... VCTG-9925A	16
	**Vacuum Drying Ovens**	VCTF-6020 ... VCTF-6250	17
	**Customized Vacuum Drying Ovens**	VCTF-6500N, VCTF-6600N	18
	**High Temperature Drying Ovens**	HCTG-9030A ... HCTG-9200A	19

SELECTION

Which cabinet do you need?

Choose the humidity class by the material you store, then the size. Every class is available in ten sizes.



HUMIDITY CLASSES

Class	INTEON code	Suitable for	Page
1–5% RH	DRY...EU	Extremely humidity sensitive devices and materials that oxidize easily: silver, brass, bronze, tungsten. Nitrogen is recommended most often.	6
1–10% RH	DRY...EC	Materials typically sensitive to humidity: high precision IC, BGA, silver and copper articles.	7
10–20% RH	DRY...EB	Precision electronic parts to be stored within 90 days: IC, BGA, special chemicals, lead free PCB, photo couplers, XTL, SCR, special samples, measuring tools.	8
1–60% RH	DRY...ED	Nitrogen or compressed air cabinet for oxidation sensitive materials, with adjustable humidity.	9

HOW TO READ THE CODE

DRY 718 E U	718 = capacity in litres, E = anti-static (ESD) coated, U = humidity class 1–5% RH
DRY 1436 E C -6	1436 litres, ESD, class 1–10% RH, 6 doors (-4: 4 doors)
DRY 870 E D	870 litres, ESD, nitrogen cabinet

CONSTRUCTION

Built to keep moisture and static out

All INTEON dry cabinets share the same construction, whatever the size or the humidity class.

INTEON STANDARD

ESD coating | LED display | ±3% RH sensor | IPC/JEDEC J-STD-033 | CE certified | RoHS coating | AC 85–265 V | 3-year warranty



Anti-static surface
RoHS certified powder coating with DuPont powder, dark ESD finish



LED display
Humidity and temperature, adjustable target humidity



Air press lock
Zinc alloy lock on each door for high air tightness and security



ESD castors
High intensity castors with brake, levelling feet on the 1436 litre cabinets

FEATURES

- 1 mm and 1.2 mm cold rolled steel
- Reinforced structure, high load bearing
- 3.2 mm tempered glass doors
- Imported humidity sensor, ±3% RH
- Smart control with adjustable humidity
- Adjustable shelves
- AC 85–265 V, 50/60 Hz, for worldwide use
- Compliant with IPC/JEDEC J-STD-033, CE certified



DRY CABINETS

ESD Dry Cabinets 1–5% RH

For extremely humidity sensitive devices and for materials that oxidize easily: silver, brass, bronze, tungsten.



To scale: 98, 160, 240, 320, 435, 540, 718, 870 and 1436 litres (4 or 6 doors).

INTEON STANDARD

ESD coating | LED display | ±3% RH sensor | Tempered glass | ESD castors | CE | IPC/JEDEC J-STD-033 | 3-year warranty

OPTIONS

Spare shelves | Drawers | Reel holder drawers | Alarm | Nitrogen module | Data logging (USB) | Custom made

- ✓ Desiccant dry unit with automatic control
- ✓ Humidity range 1–5% RH
- ✓ Adjustable shelves, tempered glass doors

TEN SIZES

Model	Capacity	Doors	Shelves	Outer size W × D × H (mm)	Inner size W × D × H (mm)
DRY98EU	98 L	1	1	448 × 400 × 688	446 × 372 × 598
DRY160EU	160 L	1	3	448 × 450 × 1010	446 × 422 × 848
DRY240EU	240 L	2	3	598 × 400 × 1310	596 × 372 × 1148
DRY320EU	320 L	2	3	900 × 450 × 1010	898 × 422 × 848
DRY435EU	435 L	2	3	900 × 600 × 1010	898 × 572 × 848
DRY540EU	540 L	2	3	598 × 710 × 1465	596 × 682 × 1298
DRY718EU	718 L	3	5	598 × 710 × 1910	596 × 682 × 1723
DRY870EU	870 L	4	5	900 × 600 × 1890	898 × 572 × 1698
DRY1436EU-4	1436 L	4	5	1200 × 710 × 1910	1198 × 682 × 1723
DRY1436EU-6	1436 L	6	5	1200 × 710 × 1910	1198 × 682 × 1723

DRY CABINETS

ESD Dry Cabinets 1–10% RH

For materials typically sensitive to humidity: high precision IC, BGA, silver and copper articles.



To scale: 98, 160, 240, 320, 435, 540, 718, 870 and 1436 litres (4 or 6 doors).

INTEON STANDARD

ESD coating · LED display · ±3% RH sensor · Tempered glass · ESD castors · CE · IPC/JEDEC J-STD-033 · 3-year warranty

OPTIONS

Spare shelves · Drawers · Reel holder drawers · Alarm · Nitrogen module · Data logging (USB) · Custom made

- ✓ Desiccant dry unit with automatic control
- ✓ Humidity range 1–10% RH
- ✓ Adjustable shelves, tempered glass doors

TEN SIZES

Model	Capacity	Doors	Shelves	Outer size W × D × H (mm)	Inner size W × D × H (mm)
DRY98EC	98 L	1	1	448 × 400 × 688	446 × 372 × 598
DRY160EC	160 L	1	3	448 × 450 × 1010	446 × 422 × 848
DRY240EC	240 L	2	3	598 × 400 × 1310	596 × 372 × 1148
DRY320EC	320 L	2	3	900 × 450 × 1010	898 × 422 × 848
DRY435EC	435 L	2	3	900 × 600 × 1010	898 × 572 × 848
DRY540EC	540 L	2	3	598 × 710 × 1465	596 × 682 × 1298
DRY718EC	718 L	3	5	598 × 710 × 1910	596 × 682 × 1723
DRY870EC	870 L	4	5	900 × 600 × 1890	898 × 572 × 1698
DRY1436EC-4	1436 L	4	5	1200 × 710 × 1910	1198 × 682 × 1723
DRY1436EC-6	1436 L	6	5	1200 × 710 × 1910	1198 × 682 × 1723

DRY CABINETS

ESD Dry Cabinets 10–20% RH

For precision electronic parts to be stored within 90 days: IC, BGA, special chemicals, lead free PCB, photo couplers, XTL, SCR, samples and measuring tools.



To scale: 98, 160, 240, 320, 435, 540, 718, 870 and 1436 litres (4 or 6 doors).

INTEON STANDARD

ESD coating · LED display · ±3% RH sensor · Tempered glass · ESD castors · CE · IPC/JEDEC J-STD-033 · 3-year warranty

OPTIONS

Spare shelves · Drawers · Reel holder drawers · Alarm · Data logging (USB) · Independent compartments · Custom made

- ✓ Desiccant dry unit with automatic control
- ✓ Humidity range 10–20% RH
- ✓ Adjustable shelves, tempered glass doors

TEN SIZES

Model	Capacity	Doors	Shelves	Outer size W × D × H (mm)	Inner size W × D × H (mm)
DRY98EB	98 L	1	1	448 × 400 × 688	446 × 372 × 598
DRY160EB	160 L	1	3	448 × 450 × 1010	446 × 422 × 848
DRY240EB	240 L	2	3	598 × 400 × 1310	596 × 372 × 1148
DRY320EB	320 L	2	3	900 × 450 × 1010	898 × 422 × 848
DRY435EB	435 L	2	3	900 × 600 × 1010	898 × 572 × 848
DRY540EB	540 L	2	3	598 × 710 × 1465	596 × 682 × 1298
DRY718EB	718 L	3	5	598 × 710 × 1910	596 × 682 × 1723
DRY870EB	870 L	4	5	900 × 600 × 1890	898 × 572 × 1698
DRY1436EB-4	1436 L	4	5	1200 × 710 × 1910	1198 × 682 × 1723
DRY1436EB-6	1436 L	6	5	1200 × 710 × 1910	1198 × 682 × 1723

DRY CABINETS

ESD Nitrogen Cabinets 1–60% RH

For oxidation sensitive components. The cabinet works with nitrogen or compressed air and holds the humidity you set between 1 and 60% RH.



Nine of the ten sizes, to scale: 98, 240, 320, 435, 540, 718, 870 and 1436 litres (4 or 6 doors).

INTEON STANDARD

ESD coating | LED display | ±3% RH sensor | Tempered glass | ESD castors | CE | IPC/JEDEC J-STD-033 | 3-year warranty

OPTIONS

Spare shelves | Drawers | Reel holder drawers | Alarm | Air flow 5–25, 5–60 or 5–300 L/min | Data logging (USB) | Custom made

- ✓ Nitrogen gas or compressed air input with adjustable flow meter
- ✓ Software controlled gas flow saves up to 70% of the nitrogen
- ✓ Adjustable between 1 and 60% RH

TEN SIZES

Model	Capacity	Doors	Shelves	Outer size W × D × H (mm)	Inner size W × D × H (mm)
DRY98ED	98 L	1	1	448 × 400 × 688	446 × 372 × 598
DRY160ED	160 L	1	3	448 × 450 × 1010	446 × 422 × 848
DRY240ED	240 L	2	3	598 × 400 × 1310	596 × 372 × 1148
DRY320ED	320 L	2	3	900 × 450 × 1010	898 × 422 × 848
DRY435ED	435 L	2	3	900 × 600 × 1010	898 × 572 × 848
DRY540ED	540 L	2	3	598 × 710 × 1465	596 × 682 × 1298
DRY718ED	718 L	3	5	598 × 710 × 1910	596 × 682 × 1723
DRY870ED	870 L	4	5	900 × 600 × 1890	898 × 572 × 1698
DRY1436ED-4	1436 L	4	5	1200 × 710 × 1910	1198 × 682 × 1723
DRY1436ED-6	1436 L	6	5	1200 × 710 × 1910	1198 × 682 × 1723

OPTIONS

Shelves, drawers and reel holders

INTEON ESD cabinets can be ordered with the interior that fits your material: extra shelves, slide drawers, or drawers that hold reels upright.

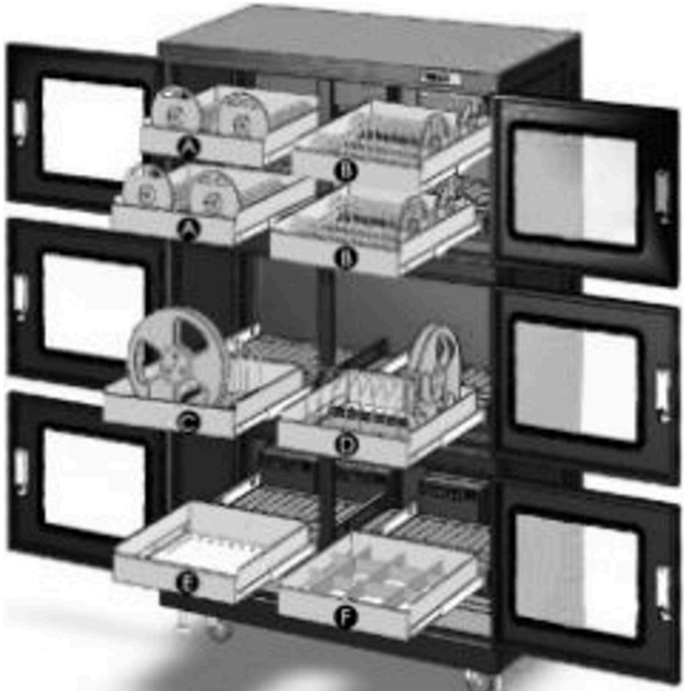

SPECIAL DRAWERS

A, B	Drawers for reels standing side by side
C, D	Reel holder drawers with dividers for larger reels
E	Flat drawer
F	Drawer with compartments

Tell us the reel diameters, widths and quantities; we propose the drawer layout for your cabinet.



Spare shelf

Adjustable shelf for every size. Standard: 1 shelf (98 L), 3 shelves (160–540 L), 5 shelves (718–1436 L).



Slide drawer

Pull-out drawers behind the glass doors.



Reel rack shelves

Slotted shelves for 7 to 15 inch reels, as in the Intelligent Reel Storage Cabinet, page 12.

ALSO AVAILABLE

ESD external storage bins | Stainless steel cabinet | Independent compartments | Custom made layout

OPTIONS

Further options



Alarm
Humidity or temperature alarm with buzzer or light tower.



Heating up to 40 or 60 °C
Low temperature baking. For DRY320, DRY435, DRY870 and DRY1436.



Independent compartments
Open one compartment, the others are not affected. For DRY320, DRY435, DRY718, DRY870, DRY1436.



N2 generator attached
Endless nitrogen for anti-oxidation. For DRY870 and DRY1436.



Oxygen content detection
Shows oxygen and humidity for components that oxidize easily.



Stainless steel
Stainless steel cabinet for clean rooms.

MORE TO CHOOSE FROM

- ✓ Nitrogen module with flow meter
- ✓ High flow air injection: 5–60 or 5–300 L/min
- ✓ Data logging by USB with software
- ✓ Security code lock
- ✓ LED light when the door opens
- ✓ Wrist strap terminal for ESD safe work
- ✓ Calibration reminder
- ✓ ESD external storage bins

Custom made Cabinets to your size, door layout, colour and interior.

SPECIAL CABINETS

Heated storage and intelligent reel storage

Dry Cabinet with 60 °C Heating

Dehumidifying and gentle baking up to 60 °C in one cabinet, with explosion-proof tempered glass.



Model	DRY-1000-H60
Humidity range	1–10% RH (DRY-C1000-H60) or 1–5% RH (DRY-U1000-H60)
Temperature range	Room temperature to 60 °C
Accuracy	±3% RH, ±1 °C
Inner size	W1052 × D625 × H1520 mm, 1000 L
Outer size	W1200 × D780 × H1960 mm
Weight	268 kg
Power consumption	max. 2300 W
Options	Data logging by USB, alarm with buzzer or light tower, nitrogen system

Intelligent Reel Storage Cabinet

Every reel position is monitored: scan the code, place the reel, and the light shows it when you need it again.



Model	CTC1436BFD-ZNLJ
Reels	7 to 15 inch, 8–70 mm thick, customizable
Capacity	13 inch: 48 reels, 15 inch: 24 reels, 18 trays
Humidity range	1–10% RH, ±3% RH, ±1 °C
Outer size	W1305 × D560 × H1915 mm
Material	1.0 mm steel, anti-static
Error prevention	Inductive sensors, QR code, alarm for a wrong position
Software	WMS, ERP and MES support
Options	Humidity alarm, data logger (USB/RJ45), networking, door open alarm and light, N2 injection

SPECIAL CABINETS

Nitrogen without a pipeline, and clean storage

Automatic Cabinet with N2 Generator

Moisture and oxidation protection where there is no nitrogen pipeline: the cabinet makes its own nitrogen.



Humidity control	1–60% RH, set value ±3% RH, uniformity ±5% RH (empty)
Storage	Two independent spaces, approx. 700 L
Independent space	W596 × D682 × H788 mm
Outer size	W1440 × D710 × H1888 mm
Doors, shelves	4 doors, 8 shelves
Control	7-inch touch screen, humidity alarm
Structure	1.0 mm steel, permanent anti-static surface
Weight	approx. 245 kg net
Power, noise	standby ≤ 15 W, max. 60 W, ≤ 55 dB at 1 m

Clean Nitrogen Cabinet

For wafers, wafer boxes and other items that must be kept free of dust.



Clean class	Class 10, Class 100, Class 1000
Humidity range	1–60% RH, ±3% RH
Inner size	W1258 × D627 × H1140 mm, approx. 1115 L
Outer size	W1300 × D800 × H1836 mm
Weight	225 kg net
Power, noise	average ≤ 15 W, ≤ 50 dB
Option	ESD system

SPECIAL CABINETS

Automatic door, constant climate

Auto Door Nitrogen Cabinet

The door opens by identification, and the cabinet can be connected to AGVs, robots and robotic arms.



Access	Facial recognition, IC card, password
Humidity range	1–10%, 10–20%, 20–60% or 1–60% RH
Accuracy	±3% RH, ±1 °C
Outer size	W1450 × D710 × H1785 mm, customizable
Control	7-inch touch screen, settings kept after power failure
Nitrogen	Stops at the target humidity, starts again when it rises
Structure	1.0 mm steel, reinforced 3.0 mm, anti-static surface
Castors	360° castors, two with brake

Constant Humidity and Temperature Cabinet

Cools, heats and dehumidifies: for chips, medicines, archives and precision parts.



Models	HCT800A, HCT800B, HCT800C
Temperature range	5–60 °C (A, B), 15–60 °C (C)
Humidity range	20–40% RH (A), 10–20% RH (B), below 10% RH (C)
Fluctuation, uniformity	≤ ±3% RH, ≤ ±2 °C
Outer size	W1170 × D610 × H1816 mm
Shelves	3, each 80 kg
Weight, noise	approx. 176 kg, ≤ 55 dB
Power	standby ≤ 15 W; dehumidifying ≤ 800 W, heating ≤ 800 W, cooling ≤ 300 W
Options	Humidity or temperature alarm, data logging (USB/RJ45), MES connection

DRYING OVENS

Desk Type Blast Drying Ovens

Bench ovens with air blast for drying, baking, temperature testing and heat aging, up to 250 or 300 °C.



INTEON STANDARD

- Timer and alarm
- LED display
- Stainless steel chamber
- CE certified
- 3-year warranty

OPTIONS

- Programmable LCD controller
- Independent temperature limiter
- RS485 and software
- Test hole
- Paperless recorder

- ✓ Stainless steel inner chamber, anti-static powder coated body
- ✓ Microcomputer control with LED display, timer and alarm
- ✓ Tempered door glass with a wide view
- ✓ Adjustable shelves, silicone door seal, inner air circulation
- ✓ Resolution 0.1 °C, fluctuation ±0.5 °C

SIZES

Model	Inner W × D × H (mm)	Outer W × D × H (mm)	Temperature	Supply	Power	Shelves
DCTG-9023A	300 × 300 × 270	580 × 480 × 440	RT+10 to 250 °C	AC 220 V	500–1050 W	2
DCTG-9053A	420 × 350 × 350	700 × 530 × 520	RT+10 to 250 °C	AC 220 V	500–1050 W	2
DCTG-9123A	550 × 350 × 550	830 × 530 × 720	RT+10 to 250 °C	AC 220 V	500–1050 W	2
DCTG-9203A	600 × 550 × 550	880 × 730 × 770	RT+10 to 250 °C	AC 220 V	500–1050 W	2
DCTG-9025A	300 × 300 × 270	580 × 480 × 440	RT+10 to 300 °C	AC 220 V	500–2100 W	2
DCTG-9055A	420 × 350 × 350	700 × 530 × 520	RT+10 to 300 °C	AC 220 V	500–2100 W	2
DCTG-9125A	550 × 350 × 550	830 × 530 × 720	RT+10 to 300 °C	AC 220 V	500–2100 W	2
DCTG-9205A	600 × 550 × 550	880 × 730 × 770	RT+10 to 300 °C	AC 220 V	500–2100 W	2

DRYING OVENS

Vertical Blast Drying Ovens

Floor and bench standing ovens from 30 litres to production size, up to 250 or 300 °C.



INTEON STANDARD

- Timer and alarm
- LED display
- Stainless steel chamber
- CE certified
- 3-year warranty

OPTIONS

- Programmable LCD controller
- Independent temperature limiter
- RS485 and software
- Test hole
- Paperless recorder

- ✓ Stainless steel inner chamber, anti-static powder coated body
- ✓ Microcomputer control with LED display, timer 0–9999 min and alarm
- ✓ Tempered door glass with a wide view
- ✓ Adjustable shelves, silicone door seal, inner air circulation
- ✓ Resolution 0.1 °C, fluctuation ±0.5 °C

SIZES

Model	Inner W × D × H (mm)	Outer W × D × H (mm)	Temperature	Supply	Power	Shelves
VCTG-9030A	340 × 320 × 320	490 × 500 × 560	RT+10 to 250 °C	AC 220 V	500–2100 W	2
VCTG-9070A	400 × 350 × 500	550 × 530 × 760	RT+10 to 250 °C	AC 220 V	500–2100 W	2
VCTG-9140A	550 × 450 × 550	700 × 650 × 810	RT+10 to 250 °C	AC 220 V	500–2100 W	2
VCTG-9240A	500 × 600 × 750	650 × 800 × 1010	RT+10 to 250 °C	AC 220 V	500–2100 W	2
VCTG-9420A	600 × 550 × 1300	750 × 750 × 1560	RT+10 to 250 °C	AC 220 V	500–6000 W	3
VCTG-9620A	800 × 600 × 1300	950 × 800 × 1560	RT+10 to 250 °C	AC 220 V	500–6000 W	4
VCTG-9920A	1000 × 600 × 1600	1150 × 800 × 1860	RT+10 to 250 °C	AC 220 V	500–6000 W	4
VCTG-9425A	600 × 550 × 1300	750 × 750 × 1560	RT+10 to 300 °C	AC 220 V	4000–7500 W	3
VCTG-9625A	800 × 600 × 1300	950 × 800 × 1560	RT+10 to 300 °C	AC 220 V	4000–7500 W	4
VCTG-9925A	1000 × 600 × 1600	1150 × 800 × 1860	RT+10 to 300 °C	AC 220 V	4000–7500 W	4

DRYING OVENS

Vacuum Drying Ovens

For materials that are heat sensitive, decompose or oxidize easily: baking in vacuum up to 250 °C.





INTEON STANDARD

Timer · LED display · Stainless steel chamber · CE certified · 3-year warranty

OPTIONS

Vacuum pump · Programmable LCD controller · RS485 and software · Test hole

- ✓ Stainless steel chamber, tempered glass door
- ✓ Microcomputer control with LED display, timer 0–9999 min
- ✓ Vacuum degree 133 Pa
- ✓ Resolution 0.1 °C, fluctuation ±0.5 °C

SIZES

Model	Inner W × D × H (mm)	Outer W × D × H (mm)	Temperature	Supply	Power	Shelves
VCTF-6020	300 × 300 × 275	580 × 450 × 450	RT+5 to 250 °C	AC 220 V	500–3500 W	1
VCTF-6030	320 × 320 × 300	630 × 510 × 460	RT+5 to 250 °C	AC 220 V	500–3500 W	1
VCTF-6050	415 × 370 × 345	720 × 525 × 535	RT+5 to 250 °C	AC 220 V	500–3500 W	2
VCTF-6090	450 × 450 × 450	615 × 590 × 1470	RT+5 to 250 °C	AC 220 V	500–3500 W	2
VCTF-6210	560 × 640 × 600	720 × 820 × 1750	RT+10 to 250 °C	AC 380 V	4100–5500 W	3
VCTF-6250	700 × 600 × 600	1050 × 760 × 910	RT+10 to 250 °C	AC 380 V	4100–5500 W	3



Desk type with vacuum pump

VCTF-6020, VCTF-6030 and VCTF-6050 are bench ovens. The vacuum pump is selected to the oven, see the pump table on page 18.

DRYING OVENS

Customized Vacuum Drying Ovens

Large vacuum ovens for thermo-sensitive materials and materials that decompose or oxidize easily.



INTEON STANDARD

304 stainless steel | Safety system | Vacuum < 133 Pa | 3-year warranty

OPTIONS

Vacuum pump | Custom made

- 304 stainless steel chamber with rounded corners, easy to clean
- Ultra-fine glass wool insulation, double-layer glass structure
- Tempered glass door with heat-resistant seal
- Resolution 0.1 °C, fluctuation ±0.1 °C, vacuum below 133 Pa
- Over-temperature alarm, phase loss, over-current and grounding protection

SIZES

Model	Inner W × D × H (mm)	Outer W × D × H (mm)	Temperature	Supply	Power	Shelves
VCTF-6500N	630 × 810 × 845	790 × 1310 × 1850	RT+10 to 250 °C	AC 380 V	9500 W	3
VCTF-6600N	680 × 900 × 990	850 × 1080 × 2050	RT+10 to 250 °C	AC 380 V	9500 W	3

VACUUM PUMPS

Model	DM2	DM4	DM8	DM15
Displacement (L/s)	2	4	8	15
Ultimate partial pressure, without / with gas ballast (Pa)	≤ 4 / 8 × 10^{-2}	≤ 4 / 8 × 10^{-2}	≤ 4 / 8 × 10^{-2}	≤ 4 / 8 × 10^{-2}
Ultimate total pressure, without / with gas ballast (Pa)	≤ 5 / 8 × 10^{-1}	≤ 5 / 8 × 10^{-1}	≤ 5 / 8 × 10^{-1}	≤ 5 / 8 × 10^{-1}
Motor power (kW)	0.37	0.55	1.1	1.5 (2.2)
Inlet / outlet port	25KF	25KF	40KF	40KF
Noise Lp/Lw (dB(A))	52/63	54/65	58/71	59/72
Weight (kg)	24	31	60	70
Size (mm)	510 × 174 × 274	550 × 174 × 274	650 × 236 × 383	700 × 236 × 383

DRYING OVENS

High Temperature Drying Ovens

Blast ovens for baking at high temperature.



INTEON STANDARD

Timer | LED display | Stainless steel chamber | 3-year warranty

OPTIONS

Programmable LCD controller | Independent temperature limiter | RS485 and software | Test hole | Paperless recorder

- ✓ Stainless steel inner chamber
- ✓ Microcomputer control with LED display
- ✓ Timer 0–9999 min
- ✓ Resolution 0.1 °C, fluctuation ±0.5 °C
- ✓ AC 220 V, 50 Hz, 2000–5500 W

SIZES

Model	Inner W × D × H (mm)	Outer W × D × H (mm)	Shelves
HCTG-9030A	320 × 320 × 300	560 × 520 × 700	2
HCTG-9050A	410 × 350 × 350	640 × 600 × 695	2
HCTG-9100A	450 × 450 × 450	690 × 750 × 650	2
HCTG-9200A	600 × 600 × 600	945 × 850 × 840	2

INTEON PRODUCT RANGE

More from INTEON



REFLOW OVENS



CONVEYORS



N2 GENERATORS



DRY CABINETS



ESD RACKS

Full product range

www.inte-on.com

INTEON

www.inte-on.com

MANUFACTURER

INTEON Corporation Limited

RM A07, 1701-02 New Trend Centre
704 Prince Edward Road East
San Po Kong, KLN, Hong Kong
E-mail: **info@inte-on.com**

DISTRIBUTOR FOR EUROPE

InterElectronic Hungary Kft.

2461 Tárnok, Pacsirtamező 3 D/1
Károly Peics **+36 30 296 45 05**
David Peics **+36 30 217 1226**
E-mail: **info@interelectronic.com**

DC-1/2027