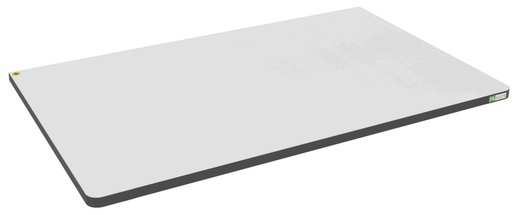
ESD MANUAL WORKSTATION
L-TYPE 2000 MM

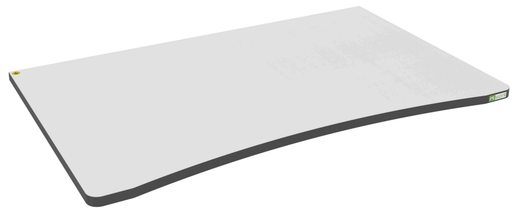


*Table with full equipment -
option to expand with additional accessories

AVAILABLE TABLETOP TYPES




RECTANGULAR TABLETOP



ERGONOMIC TABLETOP

AVAILABLE MODELS
(by dimensions)



RT-L/M/ESD/200/70

RT-L/M/ESD/200/70/E

2000 x 700 MM



RT-L/M/ESD/200/80

RT-L/M/ESD/200/80/E

2000 x 800 MM



RT-L/M/ESD/200/90

RT-L/M/ESD/200/90/E

2000 x 900 MM

+48 518 633 620

export@rtwork.pl | info@robtools.pl

www.rtwork-esd.com | www.robtools.pl

ESD MANUAL WORKSTATION
L-TYPE 2000 MM

Rectangular tabletop	**RT-L/M/ESD/200/70**	**RT-L/M/ESD/200/80**	**RT-L/M/ESD/200/90**
Ergonomic tabletop	**RT-L/M/ESD/200/70/E**	**RT-L/M/ESD/200/80/E**	**RT-L/M/ESD/200/90/E**

Type of height adjustment (mm)	MANUAL 50 MM STEP
Height adjustment range (mm)	750 - 1100
Width (mm)	2000

Depth (mm)	700	800	900
Weight (kg)	61	64	67

Max load (kg)	300
Profile dimensions (mm)	40 x 40 x 1,5 | 60 x 40 x 1,5
Sheet thickness bottom panel (mm)	1,50
Sheet thickness tabletop fixing (mm)	1,50
Sheet thickness vertical upright fixing (mm)	2,00
Color	RAL 7035 (LIGHT GREY) | RAL 9005 (BLACK)
Material of table frame	CONSTRUCTION STEEL
Tabletop	DOUBLE SIDED ANTISTATIC, DISSIPATIVE, WITH GRAPHITE ADDITIVE, COVERED WITH A MELAMINE LAYER, THICKNESS 25 mm
Possibility to choosing accessories	YES
Type of glides	SELF-LEVELLING
Resistance tabletop - grounding (Ohm)	$10^4 – 10^8$
Resistance table frame (Ohm)	$10^4 – 10^8$
Compliance with standards	ANSI/ESD S.20.20.2021, PN-EN 61340-5-1:2024, PN-EN ISO 9001:2015, PN-EN ISO 3834-2:2021, PN-EN 1090-1:2009+A1:2011

+48 518 633 620
export@rtwork.pl | info@robtools.pl
www.rtwork-esd.com | www.robtools.pl